


Cylinder/Pump HYDRAULIC RPS SERIES

Cylinder and pump combinations

Precision-matched cylinder and pump combinations for wide range of applications.

- Four styles of cylinders to choose from.
- Sets feature single- or two-speed hydraulic hand pumps.
- Cylinders of various tonnages with long, medium or short stroke.
- Includes necessary fittings, couplers and 6 foot hose.
- Gauge and gauge mounting adapter is recommended.
- Gauge and gauge mounting adapter is recommended. (See pages 124-125)

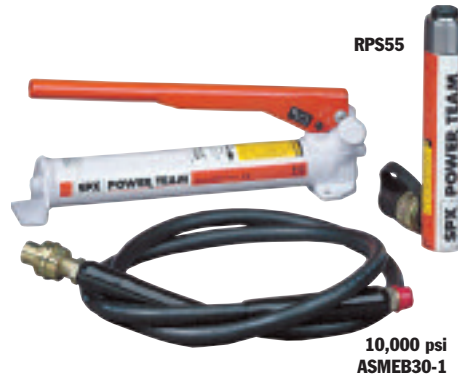

Optional Storage Box Storage box for hydraulic cylinder and pump sets. Rugged industrial strength material, strong as steel, never needs painting, won't rust, dent or chip. Weatherproof lid is self sealing and lockable. Molded-in handles, water-tight, one piece bottom and side construction. Strong enough to stand on.
No. 350722 – 35"L x 14"H x 13½"W, storage box.



Note: Actual product may differ from photo.

PUMPS

| Style of Cyl. | Cyl. Cap. (tons) | Stroke (in.) | Order No. | Retracted Height (in.) | Handle Strokes Required to Fully Extended Cylinder | Cyl. No. | Pump No. | Hose No. | Coupler No. | Pump Speed | Prod. Wt. (lbs.) |
|---------------|------------------|-------------------|------------------|------------------------|--|----------|----------|----------|-------------|------------|------------------|
| | 5 | 5¼ | RPS55 | 8½ | 75 | C55C | P12 | 9756 | 9798 | Single | 12 |
| | 10 | 2⅛ | RPS102** | 4¾ | 32 | C102C | P55 | 9756 | 9798 | Single | 26 |
| | 10 | 6⅛ | RPS106** | 9¾ | 93 | C106C | P55 | 9756 | 9798 | Single | 32.1 |
| | 10 | 10⅞ | RPS1010** | 13¾ | 154 | C1010C | P55 | 9756 | 9798 | Single | 35.6 |
| "C" Series | 15 | 4⅞ | RPS154** | 7⅞ | 81 | C154C | P55 | 9756 | 9798 | Single | 29 |
| | 15 | 6⅞ | RPS156** | 10 ^{11/16} | 118 | C156C | P55 | 9756 | 9798 | Single | 34 |
| | 25 | 6¼ | RPS256** | 10¾ | 219 | C256C | P55 | 9756 | 9798 | Single | 42.7 |
| | 25 | 14¼ | RPS2514** | 18¾ | 285* | C2514C | P159 | 9756 | 9798 | Two | 62.7 |
| | 55 | 6¼ | RPS556** | 11⅞ | 268* | C556C | P159 | 9756 | 9798 | Two | 82.7 |
| | 100 | 6 ^{5/8} | RPS1006 | 13¾ | 428* | C1006C | P460 | 9756 | 9798 | Two | 128.7 |
| "Shorty" | 30 | 2 ^{7/16} | RPS302** | 4 ^{5/8} | 61* | RSS302 | P59 | 9756 | 9798 | Two | 40 |
| | 50 | 2⅞ | RPS552** | 5 | 89* | RSS502 | P59 | 9756 | 9798 | Two | 50 |
| | 100 | 2¼ | RPS1002** | 5½ | 172* | RSS1002 | P59 | 9756 | 9798 | Two | 81 |
| "Center-Hole" | 20 | 3 | RPS203H** | 6 ^{1/16} | 80 | RH203 | P55 | 9756 | 9798 | Single | 40.5 |
| Alum. | 55 | 6⅞ | RPS556A** | 10¾ | 262* | RA556 | P159 | 9756 | 9798 | Two | 47 |

* Base on 50% if the stroke being made at low-pressure and 50% of the strokes at high pressure.

** Add suffix "B" (example: RPS102B, RPS203HB, etc.) to order set with optional storage box shown above.

