

Condensed Reel Catalog

Our Best Selling Reels



Now Including
Dual Pedestal Reels
Page 5



Page 11
Heavy Duty
Power Cord
Series L4000

Page 7
Heavy Duty
Hand Crank
30000 Series

Page 10
Large Frame
1"-4" I.D.
Series 3900

Page 5
Heavy Duty
Air/Water/Oil/Grease
Series 7000



Wind Things Up With Reelcraft

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

reelcraft.com

Why use hose reels?

Why use hose reels? Because they make hose handling more efficient and safer. Your hoses, cables and cords will last up to five times longer. You will improve hose management, which decreases labor costs. Your chances of injuries from tripping hazards will decrease, which saves

lost work time, medical bills and higher insurance. You also save the cost of replacing expensive hoses, cables and cords that get run over by fork lifts and other vehicles, which saves equipment costs. Here are the most compelling reasons to use hose, cord and cable reels.



Series 7000 Reels
Photo courtesy of Sage Oil Vac

5 reasons why hose reels add value



Improve Efficiency
Hose is where you want it, when you need it.



Increase Safety
Reduce up to 50% of tripping accidents.



Minimize Leakages
Reduce costs of air and water leakages.



Reduce Hose Wear
Hose on reels can last up to five times longer.




Better Environment
No more tangled hoses.

OSHA says reduce your slips, trips and falls

Slips, trips and falls constitute the majority of general industry accidents, which cause 15% of all accidental deaths, and are second only to motor vehicles as a cause of fatalities. The OSHA standards for walking and working surfaces apply to all permanent places of employment, except where only domestic, mining, or agricultural work is performed (www.osha.gov).

Two Year Limited Warranty


Reelcraft now offers a two year limited warranty. All products manufactured by Reelcraft Industries, Inc. are warranted to be free of defects due to faulty material or workmanship for 24 months from date of shipment, except hose. Normal wear and tear is not considered a defect in material or workmanship. Reelcraft's liability shall be limited to repair or replacement of defective material during the warranty period and will be at Reelcraft's discretion when returned pre-paid to its plant or authorized service depot. The warranty does not cover damage caused by accident, abuse, neglect or improper installation. Reelcraft products must be installed, maintained and operated in accordance to the recommendation of Reelcraft and the manual of instructions. Failure to use circuit breakers on electric motors, filter, lubricators on air motors and flexible inlet connections will void warranty. Equipment, products, components and hoses not manufactured by Reelcraft are subject to the original manufacturer's guarantee and warranties. Hoses carry a 6 month warranty as listed by the manufacturer. Reelcraft will assist in filing claims, but does not have any additional responsibility if original manufacturer denies warranty claim. Products built to customer specifications and requirements, Nordic series and series 40 or products incorporating variation from cataloged items are considered special and are not subject to cancellation or returnable for credit under any circumstances. Reelcraft reserves the right to modify or alter product, dimensions, design and construction to improve performance. **NOTE:** For complete warranty information, online warranty registration, service manuals, and return information please visit www.reelcraft.com.

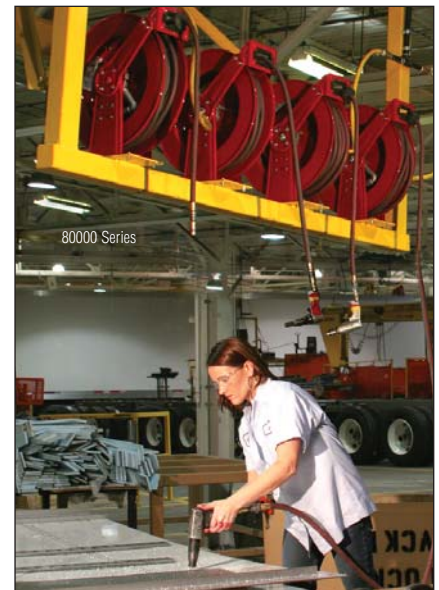

80000 Series
Wabash National Corporation, Lafayette, Indiana

Reelcraft's global offices serve:

- ✓ Europe/UK
- ✓ Canada
- ✓ Asia/Philippines
- ✓ Central America
- ✓ South America
- ✓ Middle East

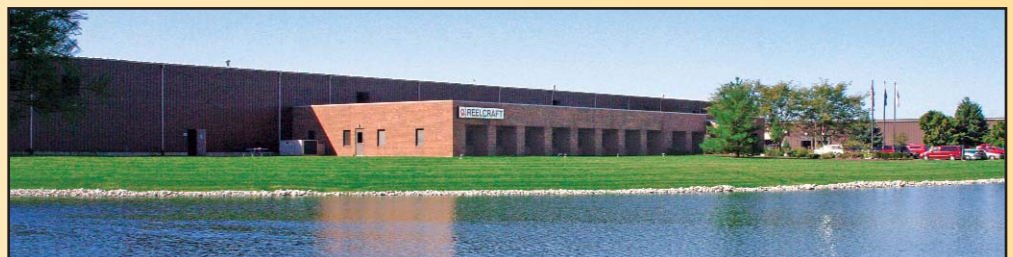

Located in Northeast Indiana since 1971, Reelcraft's global headquarters' office and manufacturing space is a state-of-the-art 130,000 square foot facility. Because we are centrally located in the US and offer a west coast warehouse, we can **quickly ship** our standard products the same day for domestic orders received by 11:30 am local time.

North America: **800-444-3134** Asia: **+63 (45) 599-3721**
Europe: **+44 (0) 1536 406999** Latin America: **260-489-1685**
www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

- Indiana Warehouse
- California Warehouse
- Indiana & California Warehouses
- Canadian Warehouse


Reelcraft: Better by Design

Reelcraft's reels are better by design because of our lasting commitment to excellence. Our engineering team is well known for designing durable, high quality products. Our standard features include durable, corrosion-resistant

powder coat paint, multi-position guide arms for versatile mounting options and heavy-duty, reinforced steel stampings for increased strength. Our reels are permanently factory-lubricated for a long, trouble-free

service life. All of these features, and many more, add up to make "The Reelcraft Difference."

Rely on Reelcraft's commitment to excellence for the highest quality hose, cord and cable reels.

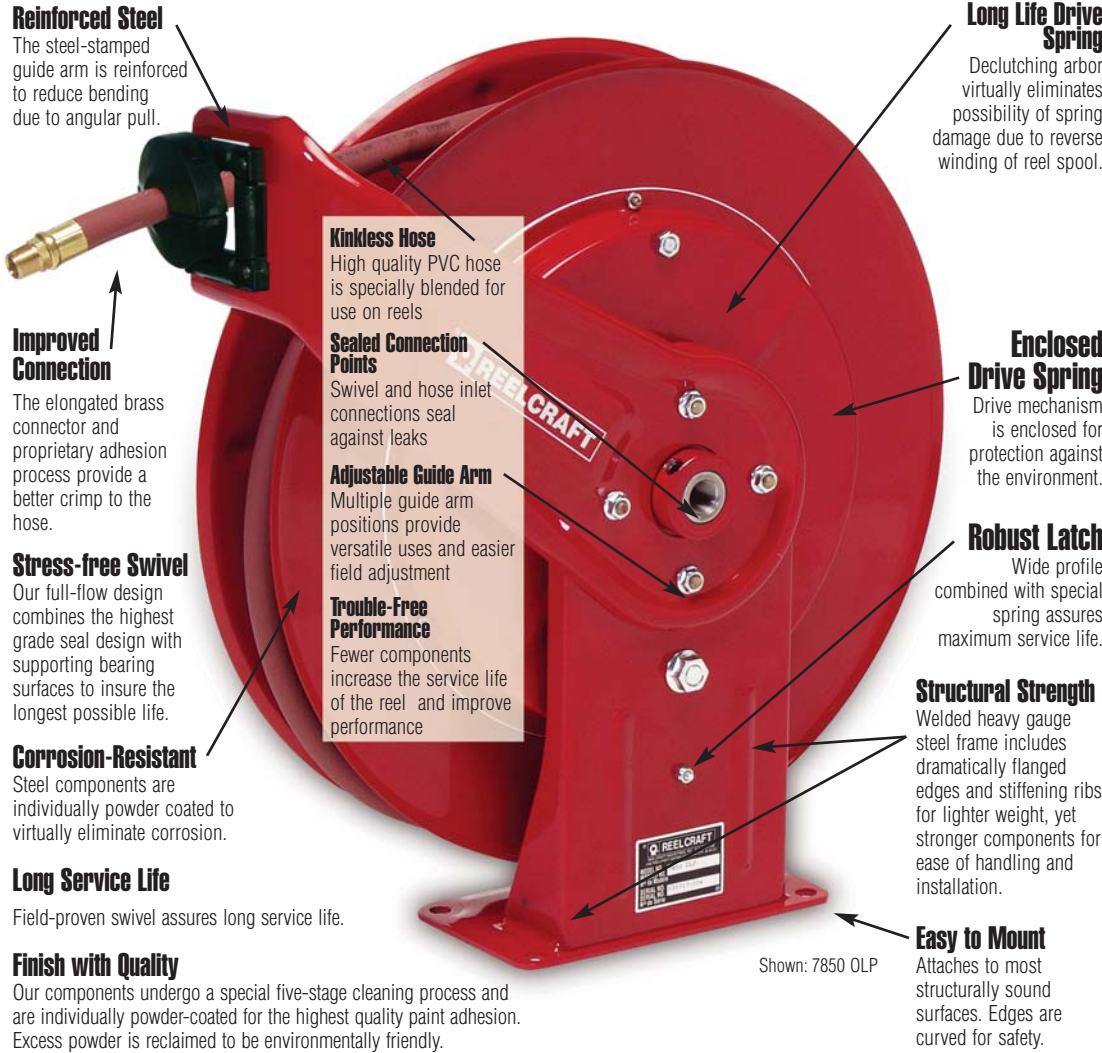

Reinforced Steel

The steel-stamped guide arm is reinforced to reduce bending due to angular pull.

Improved Connection

The elongated brass connector and proprietary adhesion process provide a better crimp to the hose.

Stress-free Swivel

Our full-flow design combines the highest grade seal design with supporting bearing surfaces to insure the longest possible life.

Corrosion-Resistant

Steel components are individually powder coated to virtually eliminate corrosion.

Long Service Life

Field-proven swivel assures long service life.

Finish with Quality

Our components undergo a special five-stage cleaning process and are individually powder-coated for the highest quality paint adhesion. Excess powder is reclaimed to be environmentally friendly.

Kinkless Hose

High quality PVC hose is specially blended for use on reels

Sealed Connection Points

Swivel and hose inlet connections seal against leaks

Adjustable Guide Arm

Multiple guide arm positions provide versatile uses and easier field adjustment

Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance

Long Life Drive Spring

Decutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.

Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.

Robust Latch

Wide profile combined with special spring assures maximum service life.

Structural Strength

Welded heavy gauge steel frame includes dramatically flanged edges and stiffening ribs for lighter weight, yet stronger components for ease of handling and installation.

Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

To place an order, please advise:

1. Model number.
2. Product to be handled such as air, oil, water, etc.
3. Maximum operating pressure in P.S.I.
4. Maximum operating temperature in degrees Fahrenheit.
5. Hose inside and outside diameters and length.
6. Installation height, especially if more than 16 feet.
7. Desired guide arm position by adding one of the suffixes to the model number. Example: 5635 OLP SW for side wind. Refer to the guide arm chart for guide arm suffix codes.

Additional Considerations:

A flexible connection between the reel and the source of supply is required to prevent possible misalignment and binding. Non-flexible connections will void the warranty. The pressure rating of inlet hose must be equal or greater than the rating of the reel.

Accessories

Reels ordered with hose and bumper are assembled complete and ready to install. Order bumpers separately for reels without hoses.

Additional questions? Please visit our website or call for assistance. For more than 30 years, our specialty is offering hose handling solutions.

Shown: 7850 OLP



Reelcraft is the industry leader for hose, cord and cable reels available anywhere in the world. Our key focus is to develop quality products that make hoses, cords and cables more productive, keep them easily accessible and make them last longer. Reelcraft is a highly innovative company in our product development and our manufacturing techniques. We are the only U.S. hose reel manufacturer to hold ISO 9001:2000 accreditation and we lead the industry in developing new cutting edge products. Our lean manufacturing and Six Sigma programs give us the core competencies to continue to deliver the world's best reel products.

Walt Sterneman
President of Reelcraft Industries





General Industrial Spring Retractable Reels

Series RT

Reelcraft presents ReelTek, a new hybrid, lighter, spring-driven hose reel with a composite spool designed for applications that are less demanding, yet require a product that can withstand industrial use. Easy to install and maintain, ReelTek conveniently keeps hose organized for a more efficient, safer work area.

- ✓ Structural Strength
- ✓ Hose Retracts Every Time
- ✓ Long Swivel Life
- ✓ Trouble-Free Maintenance
- ✓ Long Lasting Latch Spring
- ✓ Corrosion Resistance

RT650-OLP
Patent No. 7,150,425



GENERAL INDUSTRIAL SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)										
RT435-OLP	RT403-OLP	1/4	35	300	1/4	3/8	16.5	5.75	17.625	22
RT450-OLP	RT405-OLP	1/4	50	300	1/4	3/8	16.5	5.75	17.625	25
RT635-OLP	RT603-OLP	3/8	35	300	1/4	3/8	16.5	5.75	17.625	23
RT650-OLP	RT605-OLP	3/8	50	300	1/4	1/2	16.5	6.25	17.625	29
RT835-OLP	RT803-OLP	1/2	35	300	1/2	1/2	16.5	6.25	17.625	30
RT850-OLP	RT805-OLP	1/2	50	300	1/2	1/2	16.5	7.75	17.625	35
MEDIUM PRESSURE OIL REELS Maximum Temperature 150° F (65° C)										
RT635-OMP	RT603-OMP	3/8	35	1000	3/8	3/8	16.5	5.75	17.625	30
RT835-OMP	RT803-OMP	1/2	35	1000	1/2	1/2	16.5	6.25	17.625	33
HIGH PRESSURE GREASE REELS Maximum Temperature 150° F (65° C)										
RT435-OHP	RT403-OHP	1/4	35	5000	1/4	3/8	16.5	5.75	17.625	31
RT635-OHP	RT603-OHP	3/8	35	4000	3/8	1/2	16.5	6.25	17.625	34
RT650-OHP	RT605-OHP	3/8	50	4000	3/8	1/2	16.5	7.75	17.625	39

*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

Premium Duty Spring Retractable Reels

Series 4000, 5000 & 5005

Series 4000, 5000 & 5005 reels are durable and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. The Quiet Speed latch mechanism offers quiet operation combined with latch cam technology insuring longer latching life and trouble-free performance. The Series 5005 reel can handle hose lengths up to 50 feet. Reels are all steel construction and compact for different applications. The standard low pressure hose is for air or water service only. Consult Reelcraft for other products and hoses.



PREMIUM DUTY SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)										
4425 OLP	4400 OLP	1/4	25	300	1/4	3/8	12.625	5.375	12.875	19
4435 OLP	4400 OLP	1/4	35	300	1/4	3/8	12.625	5.375	12.875	20
5450 OLP	5400 OLP	1/4	50	300	1/4	3/8	13.5	6	14.5	26
4625 OLP	4600 OLP	3/8	25	300	1/4	3/8	12.625	5.375	12.875	22
5635 OLP	5600 OLP	3/8	35	300	1/4	3/8	13.5	6	14.5	25
5650 OLP	5605 OLP	3/8	50	300	1/4	3/8	16.5	6	17.5	37
A5825 OLP	A5800 OLP	1/2	25	300	1/2	3/8	13.5	6	14.5	34
A5835 OLP	A5805 OLP	1/2	35	300	3/8	3/8	16.5	6	17.5	38
A5850 OLP	A5806 OLP	1/2	50	300	1/2	3/8	16.5	7	17.5	44
MEDIUM PRESSURE OIL REELS Maximum Temperature 210° F (99° C)										
5435 OMP	5400 OMP	1/4	35	2750	1/4	3/8	13.5	6	14.5	31
5630 OMP	5600 OMP	3/8	30	2250	3/8	3/8	13.5	6	14.5	33
A5835 OMP	A5805 OMP	1/2	35	2000	1/2	3/8	16.5	6	17.5	34
HIGH PRESSURE GREASE REELS Maximum Temperature 210° F (99° C)										
5435 OHP	5405 OHP	1/4	35	5000	1/4	1/4	16.5	6	17.5	42
5625 OHP	5600 OHP	3/8	25	4000	1/4	1/4	16.5	6	14.5	31

*Weight of model with hose.

North America: 800-444-3134 Asia: +63 (45) 599-3721
Europe: +44 (0) 1536 406999 Latin America: 260-489-1685

www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse California Warehouse
 Indiana & California Warehouses Canadian Warehouse



Heavy Duty Industrial Spring Retractable Reels

Series 7000

Series 7000 is ideal for the most demanding applications. The reel's base and guide arms are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The Series 7000 incorporates all steel construction and a baked-on powder coat finish to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.



7850 OLP

HEAVY DUTY INDUSTRIAL SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)										
7650 OLP	7600 OLP	3/8	50	300	1/4	1/2	19	7	20.25	47
7670 OLP	7600 OLP	3/8	70	300	1/4	1/2	19	7	20.25	50
7850 OLP	7800 OLP	1/2	50	300	3/8	1/2	19	7	20.25	51
7925 OLP	7900 OLP	3/4	25	250	3/4	3/4	19	7	20.25	49
MEDIUM PRESSURE OIL REELS Maximum Temperature 210° F (99° C)										
7850 OMP	7800 OMP	1/2	50	2000	1/2	1/2	19	7	20.25	57
HIGH PRESSURE GREASE REELS Maximum Temperature 210° F (99° C)										
7650 OHP	7600 OHP	3/8	50	4000	1/4	1/2	19	7	20.25	60

*Weight of model with hose. Mounts to floor, wall, ceiling or truck.

Dual Pedestal Reels

Series DP7000 & 80000

Reelcraft's new DP7000 series features our patented interlocking base design, which makes the base assembly especially strong and resistant to vibration. The Series DP7000 and the series 80000 incorporate a dual pedestal base and guide arm design that is structurally reinforced. All-steel construction and a baked-on powder coat finish combine to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.



DP7850 OLP
Patent Pending

82100 OLP

DUAL PEDESTAL REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)										
DP7450 OLP	DP7400 OLP	1/4	50	300	1/4	1/2	16.5	8	17	46
DP7650 OLP	DP7600 OLP	3/8	50	300	1/4	1/2	16.5	8	17	47
81100 OLP	81000 OLP	3/8	100	300	3/8	1/2	24	10.5	25.375	92
DP7850 OLP	DP7800 OLP	1/2	50	300	3/8	1/2	16.5	9	17	50
82075 OLP	82000 OLP	1/2	75	300	1/2	1/2	24	10.5	25.375	95
82100 OLP	82000 OLP	1/2	100	300	1/2	1/2	24	10.5	25.375	101
83050 OLP	83000 OLP	3/4	50	250	3/4	3/4	24	10.5	25.375	88
D83075 OLP	D83000 OLP	3/4	75	250	3/4	3/4	24	14.25	25.375	96
D84050 OLP	D84000 OLP	1	50	250	3/4	1	24	14.25	25.375	110
MEDIUM PRESSURE OIL REELS Maximum Temperature 210° F (99° C)										
DP7650 OMP	DP7600 OMP	3/8	50	2250	3/8	1/2	16.5	8	17	55
DP7850 OMP	DP7800 OMP	1/2	50	2000	1/2	1/2	16.5	9	17	57
82075 OMP	82000 OMP	1/2	75	1500	1/2	1/2	24	10.5	25.375	101
83050 OMP	83000 OMP	3/4	50	1250	3/4	3/4	24	10.5	25.375	96
HIGH PRESSURE GREASE REELS Maximum Temperature 210° F (99° C)										
DP7450 OHP	DP7400 OHP	1/4	50	5000	1/4	1/2	16.5	8	17	57
DP7650 OHP	DP7600 OHP	3/8	50	4000	1/4	1/2	16.5	8	17	60
81075 OHP	81000 OHP	3/8	75	4000	3/8	1/2	24	10.5	25.375	88
81100 OHP	81000 OHP	3/8	100	4000	3/8	1/2	24	10.5	25.375	127

*Weight of model with hose.

North America: **800-444-3134** Asia: **+63 (45) 599-3721**
Europe: **+44 (0) 1536 406999** Latin America: **260-489-1685**

www.reelcraft.com



REELCRAFT

Wind Things Up With Reelcraft



Ultimate Duty / Floor / Truck Mount Spring Retractable Reels

Series D8000 & E9000

The aluminum cast base and arm of the Series D8000 offers the highest rigidity among this class of hose reels. The D8000 guide arms are field adjustable for floor, wall, ceiling, pit and truck mounting. Series E9000 reels offer the greatest amount of stability for high volume air or water. Fuel and petroleum models also available as standard (consult manufacturer). Ideal for portable service trucks, permanent service or plant work areas. The durable baked-on powder coat finish provides a high quality ultra violet radiation (sunlight) weather and chip resistant finish that will stay bright through years of use.



ULTIMATE DUTY / FLOOR / TRUCK MOUNT SPRING RETRACTABLE REELS											
MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)	
							LENGTH	WIDTH	HEIGHT		
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)											
D8650 OLP	D8600 OLP	3/8	50	300	1/4	1/2	19	9.25	21.25	48	
D8850 OLP	D8800 OLP	1/2	50	300	3/8	1/2	19	9.25	21.25	52	
E9299 OLPBW	E9200 OLPBW	1/2	100	300	1/2	1/2	26.25	15.75	26.25	127	
E9350 OLPBW	E9300 OLPBW	3/4	50	250	3/4	3/4	26.25	15.75	26.25	140	
E9375 OLPBW	E9300 OLPBW	3/4	75	250	3/4	3/4	26.25	15.75	26.25	152	
E9450 OLPBW	E9400 OLPBW	1	50	250	3/4	1	26.25	15.75	26.25	157	

*Weight of model with hose. Medium and high pressure styles available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing

Fuel Delivery / Grounding Reels

Series G

Static discharge reels are used to ground equipment operating in hazardous atmospheres, such as fuel trucks or carts transferring flammable materials. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reduces chances of sparking and the potential for explosion.



Series F7000, FD9000, F80000, FD80000

Reelcraft's spring retractable reels, equipped with Viton® seals, are ideal for delivering fuel. The reels incorporate metal forms to insure the greatest possible strength and function equally well in both mobile and permanent mount applications. These rugged, corrosion-resistant reels are suitable for a wide variety of applications. Series FD80000 reels are also supplied with our new ball-bearing style swivel.

GROUNDING REELS							
MODEL	CABLE LENGTH (ft)	DESCRIPTION	DIMENSIONS (in)			SHPG. WT. (lbs)	
			LENGTH	WIDTH	HEIGHT		
G 3050	50	Single 7 x 7 strand steel cable	8.62	3.35	8.81	12	
G 3050 N	50	Nylon covered cable	8.62	3.35	8.81	12	
G 3050 Y	50	Steel cable splits in 2 @ 15ft	8.62	3.35	8.81	12	
GA3100 N	100	Nylon covered cable	9.25	4.31	9.75	22	

FUEL REELS											
MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)	
							LENGTH	WIDTH	HEIGHT		
F7925 OLP	F7900 OLP	3/4	25	**50	3/4	3/4	19	7	20.25	53	
F83050 OLP	F83000 OLP	3/4	50	**50	3/4	3/4	24	10.5	25.375	89	
FD83075 OLP	FD83000 OLP	3/4	75	**50	3/4	3/4	24	14.25	25.375	130	
FD84050 OLP	FD84000 OLP	1	50	**50	1	1	24	14.25	25.375	120	
FD9350 OLPBW	FD9300 OLPBW	3/4	50	**50	3/4	3/4	26.25	15.75	26.25	140	
FD9450 OLPBW	FD9400 OLPBW	1	50	**50	1	1	26.25	15.75	26.25	157	


*Weight of model with hose. **Models equipped with fuel grade hose. UL330 and ULC approved hose. 250 PSI minimum burst. Note: Images of each series not shown above. See page 5 for 7000 & 9000 images.



Light Duty Hand Crank Reels

Light duty, hand-crank hose reels are an economical choice for storing and retrieving infrequently-used hose when not in use. Hose not included.

NEW!

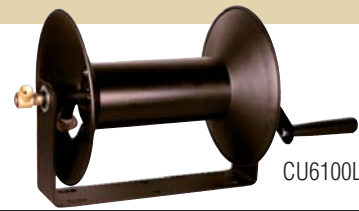

CU6100LN

LIGHT INDUSTRIAL HAND CRANK REELS

MODEL NO.	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)
						LENGTH	WIDTH	HEIGHT	
CU6050LN	3/8	50	250	3/8	3/8	16.875	11	11.5	10
CU6100LN	3/8	100	250	3/8	3/8	21.5	11	11.5	13

Premium Hand Crank / Heavy Duty Hand Crank / Motor Driven Reels

Series H & 30000

The Series H is an economical reel designed for medium duty applications requiring long lengths of hose. The Series 30000 reel features vibration-proof, self-locking fasteners to ensure assembly integrity. Equally suited for plant or field use such as lawn care, pest control and more.



H18000 M



CA33112 L

PREMIUM HAND CRANK, HEAVY DUTY HAND CRANK & MOTOR DRIVEN REELS

MODEL	HOSE I.D. (in.)	HOSE CAPACITY (ft.)	MAX PSI	(F) NPTF REEL OUTLET (in.)	(F) NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)	
						LENGTH	WIDTH	HEIGHT		
PREMIUM HAND CRANK REELS										
H18000 M	1/2	200	1000	1/2	1/2	20	18.25	19	33	
H29000 M	3/4	150	1000	3/4	3/4	20	24.25	19	41	
HEAVY DUTY HAND CRANK REELS										
CA32106 L	1/2	100	1000	1/2	1/2	19	17.75	20.25	42	
CA32112 L	1/2	200	1000	1/2	1/2	25	17.75	20.25	49	
CA33106 L	3/4	50	1000	3/4	3/4	19	17.75	20.25	43	
CA33112 L	3/4	100	1000	3/4	3/4	25	17.75	20.25	47	
CA33118 L	3/4	175	1000	3/4	3/4	31	17.75	20.25	56	
CA37118 L	1	100	300	1	1	31	17.75	20.25	57	
CA32112 M	1/2	200	3000	1/2	1/2	25	17.75	20.25	49	
CA33112 M	3/4	100	3000	3/4	3/4	25	17.75	20.25	53	
MOTOR DRIVEN REELS - 12VDC (24 VDC, 115 VAC & Air Motors available as standard)										
EA32118 L12D	1/2	325	1000	1/2	1/2	31.25	17.75	20.25	71	
EA33112 L12D	3/4	100	1000	3/4	3/4	25.25	17.75	20.25	70	

Hose not included. Many sizes not listed available as standard, contact manufacturer or go to www.reelcraft.com for master catalog listing.

Pressure Wash Reels

Series 3000, H18006 & PW80000

Compact design and quality steel construction are incorporated into Reelcraft's newest line of pressure wash reels. The Series H18006 and PW80000 reels are able to carry 100 to 400 feet of tangle-free hose and come complete with Super Swivel® for maximum product delivery. Super Swivel® is designed to handle a broad range of pressures, temperatures and chemicals; perfect for agriculture/marine, equipment cleaning and pressure washing applications.

PW81000 OHP
Hose not included



PRESSURE WASH REELS

MODEL	HOSE I.D. (in)	HOSE CAPACITY(ft)	MAX PSI	(F) NPTF REEL OUTLET (in)	(F) NPTF REEL INLET (in)	DIMENSIONS (in)			SHPG. WT. (lbs)	
						LENGTH	WIDTH	HEIGHT		
HAND CRANK REELS										
H18006 M*	3/8	100	3000	1/2	1/2	18.25	20	19	31	
CA38106 M*	3/8	140	3000	1/2	1/2	19	17.75	20.25	44	
CA38112 M*	3/8	300	3000	1/2	1/2	25	17.75	20.25	49	
SPRING DRIVEN REELS										
PW7600 OHP*	3/8	50	4500	1/2	1/2	19	7	20.25	46	
PW7650 OHP	3/8	50	4500	1/4	1/2	19	7	20.25	50	
PW81000 OHP*	3/8	100	4500	3/8	1/2	24	10.5	25.375	81	

*Hose not included. See top of page for images of Series H and 30000.



Potable (Drinking Water) & Pre-Rinse Reels Series 5000

Our potable (drinking) water reel features a full flow stainless steel shaft and PVC swivel and convenient fast hook-up and disconnect. Reelcraft's pre-rinse reels are crafted for use in commercial establishments such as restaurants and institutions. A standard lever-operated spray valve is included.



5635 OLPSW5

A5835 OLBSW23
Drinking Water Reel (NSF61)

POTABLE & PRE-RINSE REELS

MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT.
						LENGTH	WIDTH	HEIGHT	
A5835 OLBSW23	1/2	35	150	3/4 Garden Hose (F)	1/2 male	13.75	6	14.5	35
5635 OLPSW5	3/8	35	250	Spray Valve	3/8	13.75	6	14.5	27
5635 ELPSW5	3/8	35	250	Spray Valve	3/8	15	2.5	18.5	39
5635 OLSSW5*	3/8	35	250	Spray Valve	3/8	13.5	6	14.5	29
600248	360° swivel (place between hose and nozzle) on spray valve type								0.5

*Stainless Steel Reel

Air / Water / Chemical Delivery Reels Series S

The S Series is economical, lightweight and easy to handle. Its technical design and materials were selected to meet the demands of an industrial grade reel for continuous, trouble-free operation. This reel is made of corrosion proof, tough polypropylene and extensive tests have shown it to be highly resistant to the vast majority of acids, alkalis and UV Rays. The S Series design both protects the hose and allows easy cleaning of both hose and reel. Wall or floor mount.

New, Improved Design!



SGA3650 OLP

SERIES S REELS

MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(M)NPTF HOSE OUTLET (in.)	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)
						LENGTH	WIDTH	HEIGHT	
AIR* & WATER* REELS Working temperature 150° F (65° C).									
SGA3650 OLP	3/8	50	232	3/8	3/8	22.75	9.5	19	23
SGA3665 OLP	3/8	66	232	3/8	3/8	22.75	9.5	19	27
SGA3850 OLP	1/2	50	232	1/2	1/2	22.75	9.5	19	27
WATER REEL Garden-style hose end. Working temperature 150° F (65° C).									
SWA3850 OLP	5/8	50	145	3/4 NH	1/2	22.75	9.5	19	27
HOT WATER WASH REEL Working temperature 185° F (85° C). Working pressure is related to working temperature.									
SHA3850 OLP	1/2	50	232	1/2	1/2	22.75	9.5	19	27
CHEMICAL DELIVERY REEL Working temperature 150° F (65° C).									
SCA3850 OLP	1/2	50	232	1/2	1/2	22.75	9.5	19	27
OXYGEN/ACETYLENE REEL Working temperature 150° F (65° C).									
STW3450 OLP	1/4	50	300	9/16"18(F)LH-RH	9/16"18(F)LH-RH	22.75	11.25	19	27

Hose included. *Air hose can be used for water on these models.

Corrosion Resistant Reels Stainless Steel Series

Stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial solvent handling. Also suitable for coastal, offshore and on-board ship in marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels. Swivels include Viton® "O" rings.



7000 Series

D 9000 Series

STAINLESS STEEL REELS

MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	(F)NPTF REEL INLET (in.)	DIMENSIONS (in.)			SHPG. WT. (lbs.)
					LENGTH	WIDTH	HEIGHT	
5600 OLS	3/8	35	500	3/8	13.75	6	14.5	23
7800 OLS	1/2	50	500	1/2	19	7	20.25	44
82000 OLS	1/2	100	500	1/2	24	10.5	25.375	81
D83000 OLS	3/4	75	500	3/4	24.25	14.25	25.375	76
D9300 OLSBW	3/4	75	500	3/4	26.25	12	26.25	116
D84000 OLS	1	50	500	1	24.25	14.25	25.375	77
HS18000 M	1/2	200	3000	1/2	20	12	19	37

Hose and bumper not included.

North America: 800-444-3134 Asia: +63 (45) 599-3721
Europe: +44 (0) 1536 406999 Latin America: 260-489-1685

www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

IN Indiana Warehouse CA California Warehouse
CA Indiana & California Warehouses
Canada Canadian Warehouse



Gas Welding Reels

Series TW & BA (Spring Retractable)

Series TW and BA has an independent dual swivel body manufactured from aluminum and hard coated for wear resistance. This unique design assures positive separation of gases. Double-sealed, special molded "O" rings prevent leakage. Swivel body and inlet are both permanently identified with machined grooves on the acetylene side to assure proper installation.



Safe-T-Reel
T-1225-04



TW7450 OLP

Safe-T-Reel Series (Hand Crank)

Safe-T-Reels feature a high rigidity due to a one inch shaft with tapered roller bearings. These reels are compact and flexible and made of non-conductive materials.

Customer Care

When you call Reelcraft, you get a live voice and fast, friendly service.

GAS WELDING REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE CAPACITY (ft)	MAX PSI	HOSE OUTLET(in)	REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
INB TW5425 OLPT	TW5400 OLPT	1/4	25	200	B 9/16-18 (F)	1/4 (F)NPT	13.75	6	14.5	26
INB TW7450 OLPT	TW7400 OLPT	1/4	50	200	B 9/16-18 (F)	1/4 (F)NPT	19	7	20.25	53
INB TW7460 OLPT	TW7400 OLPT	1/4	60	200	B 9/16-18 (F)	1/4 (F)NPT	19	7	20.25	55
QSB TW84100 OLPT	TW84000 OLPT	1/4	100	200	B 9/16-18 (F)	B 9/16-18 (M)	24	13	25.375	105
QSB TW86075 OLPT	TW86000 OLPT	3/8	75	200	B 9/16-18 (F)	B 9/16-18 (M)	24	13	25.375	99
					REEL OUTLET(in)	REEL INLET (in)				
	BA36106 LT	1/4	*125	200	B 9/16-18 (M)	1/4 (F)NPT	17.75	16.625	20.625	50
	BA36112 LT	1/4	*250	200	B 9/16-18 (M)	1/4 (F)NPT	17.75	22.625	20.625	57
CA	T-1225-04	1/4	*150	200	B 9/16-18 (M)	B 9/16-18 (M)	15.75	18	19	19

*Weight of model with hose.

Cable Welding Reels

Series WC & CEA (Spring Retractable)

Series CEA and WC are designed to increase the safety in the work area with a resulting increase in efficiency and productivity. Welding cable reels store work lead or electrode lead, up to #2/0, safely and effectively when not in use. They have a continuous current path through a live 400 AMP, 90VDC (maximum) rated enclosed slip ring. Keeps work area and vehicles better organized resulting in better space utilization.

Caution:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.



WC7000

Shown with clamp and cable (not included)



Safe-T-Reel
T-2464-0

Safe-T-Reel Series (Hand Crank)

Safe-T-Reels are ideal for applications where space, weight and flexibility are key. These reels are designed for manual winding of welding cables. Versatile in function, select configurations to suit specific needs. Safe-T-Reels offer trouble-free management of large capacities of cable. Suitable for outdoor use.

CABLE WELDING REELS

MODEL	CABLE CAPACITY (ft.)				AMPS	STYLE	DIMENSIONS (in.)			SHPG. WT. (lbs.)
	#2	#1	1/0	2/0			LENGTH	WIDTH	HEIGHT	
WC7000	----	50	50	50	400	Spring Drive	19	14.5	20.25	49
WC80001	----	75	75	75	400	Spring Drive	24	16	25.375	80
QSB CEA30006	300	250	200	150	400	Single Hand Crank	19.375	21	20.25	49
INB CEA30012	500	500	400	300	400	Single Hand Crank	19.375	27	20.25	56
CA T-1460-0	----	250	200	200	300	Single Hand Crank	18	15.75	19	22
QSB T-2462-0	----	250	200	200	300	Dual Hand Crank/ Side-by-Side	18	29	19	50
QSB T-2464-0	----	250	200	200	300	Dual Hand Crank/ Stacked	18	16.25	38	59

Cable not included.

North America: 800-444-3134 Asia: +63 (45) 599-3721
Europe: +44 (0) 1536 406999 Latin America: 260-489-1685

www.reelcraft.com



Wind Things Up With Reelcraft



Dual Hydraulic Spring Retractable Reels

Series TH

The hydraulic series reel incorporates contemporary engineering and manufacturing techniques to give trouble free performance. Used for medium pressure dual hydraulic hose applications, Series TH reels are ideal for operating hydraulic cylinders, tools and equipment. Reels are all steel construction and compact for applications with critical space requirements.



TH88050 OMP

DUAL HYDRAULIC SPRING RETRACTABLE REELS

MODEL w/ HOSE	MODEL w/o HOSE	HOSE I.D. (in)	HOSE LENGTH (ft)	MAX PSI	(M)NPTF HOSE OUTLET (in)	(F)NPTF REEL INLET (in)	DIMENSIONS (in)			*SHPG. WT. (lbs)
							LENGTH	WIDTH	HEIGHT	
TH5425 OMP	TH5400 OMP	1/4	25	2000	1/4	1/4	13.5	6	14.5	34
TH7445 OMP	TH7400 OMP	1/4	45	2000	1/4	1/4	19	7	20.25	67
THA7630 OMP	THA7600 OMP	3/8	30	2000	3/8	3/8	19	7	20.25	60
TH86050 OMP	TH86000 OMP	3/8	50	2000	3/8	3/8	24	13	25.375	99
TH88050 OMP	TH88000 OMP	1/2	50	2000	1/2	1/2	24	13	25.375	104

*Weight of model with hose.

Modular Large Frame Reels

Series 40 - 1" to 2" ID; Lengths to 300'

The series 40 line of large frame reels offers dimensional flexibility. Simply specify height, width and depth dimensions to fit your space requirements. Custom configurations will be built as standard in just five working days. Contact customer service for our full range of series 40 reels.



Series 40
Patent Pending

Large Frame Reels

Nordic Series

Rugged and durable, chain and sprocket drive powered by AC or DC electric motor with auxillary belt crank. Nordic Series reels are equipped with the standard welded frame and heavy duty cast bevel gears for reliable performance.



3900 Series

NORDIC SERIES LARGE FRAME REELS

MODEL	HOSE I.D. (in.)	HOSE LENGTH (ft.)	MAX PSI	DIMENSIONS (in.)			SHPG. WT. (lbs.)
				*LENGTH	WIDTH	HEIGHT	
2400-21-10-10FF	1	50	1000	25	20	26.5	72
2400-25-12-10FF	1	100	1000	25	22	26.5	74
2400-25-16-10FF	1	150	1000	25	26	26.5	80
2400-25-22-10FF	1	200	1000	25	32	26.5	86
3900-25-10-15FF	1 1/2	50	300	25	20	26.5	89
3900-25-14-15FF	1 1/2	75	300	25	24	26.5	93
3900-31-14-15FF	1 1/2	105	300	31	24	32.5	92
3900-31-20-15FF	1 1/2	150	300	31	30	32.5	96
3700-25-16-20F2	2	50	300	26	26	26.5	124
3700-31-18-20F2	2	100	300	31	28	32.5	124
3700-31-24-20F2	2	125	300	31	34	32.5	148
EP5900-39-16-25F1	2 1/2	80	300	39	29	40.5	242
EP5900-39-16-30F1	3	50	300	39	29	40.5	242

*For Electric Motor models add 3" to length shown in above chart.

3900-31-12-15FF

Drive Type:

EP - Electric Motor, 12VDC explosion proof
Bevel Crank(standard)
Also available, non-explosion proof 12 or 24 DC, explosion proof 115 AC, 24DC. Contact manufacturer.

Tool Balancers

Series TB & TBL

Tool balancers make tools nearly weightless, reducing operator fatigue. The Series TB and TBL improve safety and ergonomics and help prevent tools from being accidentally dropped, reducing tool damage.



Heavy Duty
TBL 10

TOOL BALANCERS Medium Duty

MODEL	Min-Max Load (lbs.)	Cable Lgth.	Ratchet Lock	Wgt. (lbs.)
TB 01	0 - 1.5	6'	NO	1
TB 03	1.5 - 3	6'	NO	1
TB 05	3 - 5	6'	NO	1.5

TOOL BALANCERS Heavy Duty

MODEL	Min-Max Load (lbs.)	Cable Lgth.	Ratchet Lock	Wgt. (lbs.)
TB 10	5 - 10	8'	NO	10
TB 12	8 - 12	8'	NO	10
TB 15	10 - 15	8'	NO	10
TB 23	16 - 23	8'	NO	10
TBL 10	5 - 10	8'	YES	6
TBL 12	8 - 12	8'	YES	7
TBL 15	10 - 15	8'	YES	8
TBL 23	16 - 23	8'	YES	8



Light/Medium Duty Cord Reels

Series LD & LG

Reelcraft's new line of light and medium duty cord reels are designed for less strenuous applications in which a capable and long-lasting reel is required. These reels accommodate lengths of 16/3, 14/3, 12/3, and 10/3 diameter cable. They help make the workplace safe by keeping long electrical cords up and out of harm's way.



NEW!



Light Duty
LD2040 163 2

NEW!



Medium Duty
LG3050 143 9

Power Cord & Light Reels

Series 4000 & 5000

Series 4000 & 5000 power cord and light reels offer many different styles of outlets and lamps. Easy to mount and structurally strong, the power cord and light reels have robotically welded heavy gauge steel frame that attaches to most structurally sound surfaces. Multiple guide arm positions allows for versatile uses and easier field adjustment. The drive mechanism is enclosed for protection against the environment.




NEW!



Heavy Duty
L 4050 163 8



Heavy Duty
L 4050 163 3

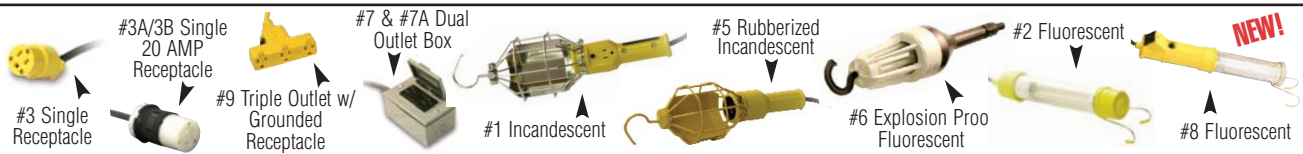

POWER CORD & CABLE REELS

MODEL	ACCESSORY	CORD SPECIFICATIONS				DIMENSIONS (in.)			VOLTS	AMPS	SHPG. WT (lbs.)
		LENGTH	# COND	AWG	TYPE	LENGTH	WIDTH	HEIGHT			
LD2030 163 9	Triple Receptacle	30'	3	16	SJTW	9.75	4	11.5	125	10	9
LD2030 143 9	Triple Receptacle	30'	3	14	SJTW	9.75	4	11.5	125	13	10
LG3050 143 9	Triple Receptacle	50'	3	14	SJTW	11.5	5	15.25	125	13	15
LG3040 123 9	Triple Receptacle	40'	3	12	SJTW	11.5	5	15.25	125	15	15
L 4035 163 3	Single Receptacle	35'	3	16	SJTOW	12.625	9.375	13.25	115	13	22
L 4050 163 3	Single Receptacle	50'	3	16	SJTOW	12.625	9.375	13.25	115	13	26
L 4545 123 3	Single Receptacle	45'	3	12	SJEOW	12.625	9.375	13.25	115	15	28
L 5550 123 3	Single Receptacle	50'	3	12	STOW	12.5	16.5	17.5	115	15	47
L 4545 123 3A	Single Connector	45'	3	12	SJEOW	12.625	9.375	13.25	115	20	29
L 4545 123 3B	Twist Lock Connector	45'	3	12	SJEOW	12.625	9.375	13.25	115	20	29
L 4545 123 7 *	Duplex Outlet Box w/GFCI (F)	45'	3	12	SJEOW	12.625	9.375	13.25	115	20	29
L 5550 123 7 *	Duplex Outlet Box w/GFCI (F)	50'	3	12	STOW	12.5	16.5	17.5	115	20	47
LD2040 163 2	Fluorescent	40'	3	16	SJTW	9.75	4	11.5	120	0.3	9
LG3050 163 8	Fluorescent	50'	3	16	SJTW	11.5	5	15.25	120	0.3	15
L 4035 163 1	Incandescent	35'	3	16	SJTOW	12.625	9.375	13.25	115	13	22
L 4050 163 1	Incandescent	50'	3	16	SJTOW	12.625	9.375	13.25	115	13	23
L 4035 162 2	Fluorescent	35'	2	16	SJTOW	12.625	9.375	13.25	115	0.3	23
L 4050 162 2	Fluorescent	50'	2	16	SJTOW	12.625	9.375	13.25	115	0.3	24
L 4035 A 163 5**	Rubberized Incandescent	35'	3	16	SJOW	12.625	9.375	13.25	115	15	25
L 5245 A 163 6X**	Explosion Proof Fluorescent	45'	3	16	SEOW	13.75	12.5	14.5	115	0.3	32
L 4035 163 8	Fluorescent Light & Outlet	35'	3	16	SJTO	12.625	9.375	13.25	115	0.3	26
L 4050 163 8	Fluorescent Light & Outlet	50'	3	16	SJTO	12.625	9.375	13.25	115	0.3	27

Incandescent bulb 75 watt maximum. For indoor use only. All models UL listed at 115 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220V. *GFCI with hard wire-lead. **Auto Switch models.

Light Duty Hand Crank Reels

Series LH

Reelcraft's convenient new Series LH provides portable power with four circuit breakers built into the reel.



LIGHT DUTY HAND CRANK

MODEL (with cable)	CORD SPECIFICATIONS				VOLTS	AMPS	Wgt. lbs
	AWG	No. Cond.	Lgth.	Type			
LH2080 143	14	3	80'	SJTW	125	10	13
LH3100*	10	3	100'	STW	125	15	7

*Does not include cable

NEW!




LH2080 143




Heavy Duty
Welding
TW7450 OLP


Truck provided by E&B Paving, Anderson, IN



917-1097




DP-407



737-1194



1123-802



735-1194

Work Smarter

North America Corporate Headquarters

One Reelcraft Center • P.O. Box 248
Columbia City, IN 46725-0248
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
e-mail: reelcraft@reelcraft.com
www.reelcraft.com

Asia Pacific

7550 A Bonifacio Ave., Cargohaus Building
Clark Special Economics Zone, Clark Field
Pampanga, Philippines
Ph: +63 (45) 599-3721
Fax: +63 (45) 599-3722
e-mail: rap@comclark.com
www.reelcraft.com/asia

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958
Ft. Wayne, IN 46866
Ph: 260-489-1685
Fax: 260-489-0203
e-mail: info@t-i-i.com
www.reelcraft.com/latinamerica

Did you know...

We now offer our Condensed
Catalog in **Spanish, French*,
German* and Chinese***

*Available in PDF only

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire • NN18 8AG
United Kingdom
Ph: +44 (0) 1536 406999
Fax: +44 (0) 1536 406777
e-mail: europe@reelcraft.com
www.reelcraft.com/europe

Canada

1705 Argentia Rd. Unit #7
Mississauga, ON L5N 3A9
Ph: 800-444-3134 • Fax: 800-444-4587
e-mail: reelcraft@reelcraft.com

Australia

PO Box 6463 BC, Blacktown
NSW 2148, Australia
Ph: +61 (2) 9621 8988
Fax: +61 (2) 9621 7688
e-mail: sales@recoil.com

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: 0519-85122391-8004
Fax: 0519-85129309
email: rco@reelcraftchina.com
www.reelcraft.com/china



Wind Things Up With Reelcraft

reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996