



AIR TOOL

Supplement

Abrasive Air Saws



Air Inlet Size: 1/2" NPT
Hose Size : 1/2" (13mm)




Model	Wheel Arbor	Max Operating Speed	Power Output	Guard Size	Air Consumpt.	Ordering Number
65VBW	5/8"-11	6,000	4 hp	9	75 cfm	65VBW;6000;9
	1"	6,000		12		65VBW;6000;12
	1"	5,000		14		65VBW;5000;14

Water Attachment available (Optional Extra)

Vertical Grinders for use with Depressed Centre Wheels



Air Inlet Size: 1/2" NPT
Hose Size: 1/2" (13mm)
Arbor Size: 5/8"-11
Optional handle styles are available.

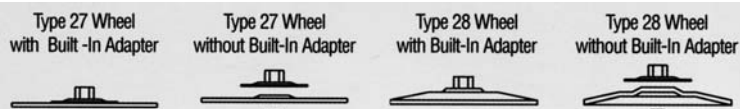


Model	Guard Size	Max Operating Speed	Power Output	Air Consumpt.	Weight	Safety Lever
54VK	7"	6000 rpm	3 hp	45 cfm	8.8 lbs.	54VK;6000;727
	9"	6000 rpm				54VK;6000;727
64VK	7"	6000 rpm	4 hp	50 cfm	11 lbs.	64VK;6000;727
	9"	6000 rpm				64VK;6000;927

6,000 rpm standard, 8,000 rpm available. Wheel Kit sold separately.

Vertical Grinders for use with Cup Wheels



Air Inlet Size: 1/2" NPT
Hose Size: 1/2" (13mm)
Arbor Size: 5/8"-11
Optional handle styles are available.




Model	Guard Size	Max Operating Speed	Power Output	Air Consumpt.	Weight	Safety Lever
58CK	6"	6000 rpm	3 hp	45 cfm	8.8 lbs.	58CK;6000;611
68CK	6"	6000 rpm	4 hp	50 cfm	11 lbs.	68CK;6000;611

Grinders for Depressed Centre Wheels, Cut Off Wheels & Flap Wheels



Air Inlet Size: 1/4" NPT
Hose Size : 3/8" (10mm)
- Available in Aluminum or Steel Casing, Extended Neck versions.

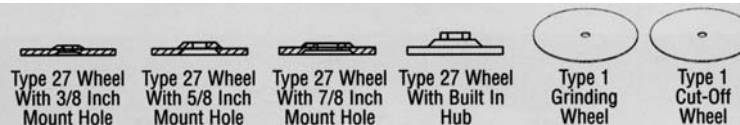

Model	Spindle Thread	Guard Size	Power Output	Air Consumpt.	Rated Speed	Safety Lever
44RAK	3/8"-24	4"	.9 hp	30 cfm	11,000 rpm	44RA4K;11000;427
	5/8"-11	4-1/2"				44RA2K;11000;4527


Call for complete catalogue.

TOP CAT AIR TOOL Supplement

Right Angle Grinders for use with Depressed Centre & Type 1 Grinding/Cut-Off Wheels



Air Inlet Size: 3/8" NPT
Hose Size : 1/2" (13mm)

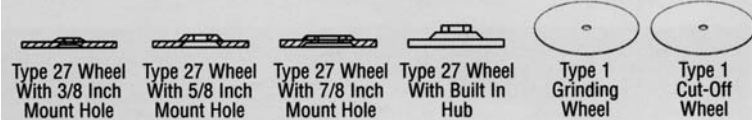

Model	Guard Size	Power Output	Air Consumpt.	Length	Max Operating Speed	Safety Lever
400RAK	4"	1.2 hp	35 cfm	7.09"	10,000 rpm	400RA4K;10000;427
	4-1/2"					400RA2K;10000;4527
	5"					400RA2K;10000;527

- Special Features:**
- Extended Neck or Standard Length available.
 - Optional Rear Exhaust.
 - Dual Position Dead Handle Mount
 - Available in Steel or Aluminum Housing.

6,000 rpm standard, 8,000 rpm available.




Air Inlet Size: 1/2" NPT
Hose Size: 1/2" (13mm)

Model	Guard Size	Power Output	Air Consumpt.	Length	Max Operating Speed	Safety Lever
520RAK	7"	2 hp	40 cfm	15"	6,000 rpm	520RA2K;6000;727
	9"					520RA2K;6000;927

- Special Features:**
- 5/8"-11 Spindle Lock Mechanism (Standard Equipment)
 - Dual Position Dead Handle
 - Adjustable Guard Position
 - 10" Cut-Off Tool available.
 - Optional handle styles are available.

Top Cat manufactures a complete line of Angle Grinders, Sanders and Cut-Off Tools from 3" - 10".

Right Angle Collet Grinders

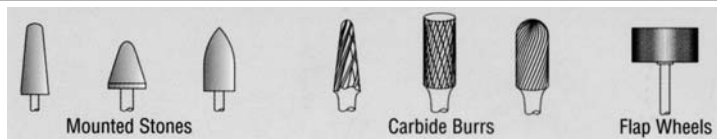

290RAD



420RAD


Air Inlet Size: 1/4" NPT
Hose Size : 3/8" (10mm)

Model	Collet Size	Max Operating Speed	Rated Power	Aver. Air Consumpt.	Length	Safety Lever
290RAD	1/4"	26,000 rpm	.4 hp	18	6.72"	290RADKS;26000;1/4
340RAD		20,000 rpm	.7 hp	25	6.72"	340RADKS;20000;1/4
420RAD		13,000 rpm	1.2 hp	35	9.74"	420RADKS;13000;1/4

- Special Features:**
- Exhaust Options, some models
 - Available in steel and aluminum housing.
 - Available in Extended or Standard Length necks.

TOP CAT AIR TOOL Supplement

Die Grinders with Erickson Style Collets for Carbide Burrs & Mounted Stones

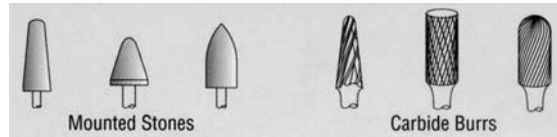

Air Inlet Size: 1/4" NPT
Hose Size : 3/8" (10mm)
 - Weight 1.9 lbs.
 - Front or Side Exhaust

Model	Collet Size	Power Output	Air Consumpt.	Length	Max Operating Speed	Safety Lever
40GK	1/4"	.9 hp	30 cfm	5.8"	18,000 rpm	40GK;18000;1/4
					22,000 rpm	40GK;22000;1/4

400GHD



5102HKS




Air Inlet Size:
 400GHD 3/8" NPT
 5102H 1/2" NPT
Hose Size :
 400GHD &
 5102H 1/2" (13 mm)

Model	Collet Size	Power Output	Air Consumpt.	Length	Max Operating Speed	Safety Lever
400GHD	1/4"	1.2 hp	25 cfm	12.5"	20,000	400GHKSD;20000;1/4
5102H		1.5 hp	35 cfm	17" - 23"	18,000	5102HKS;18000;1/4

Top Cat manufactures a complete line of Angle and Extended Die Grinders, from .4 - 4 hp and Extended models up to 5' long.

Horizontal Grinders for Type 1 Wheels, Flap Wheels and Wire Wheels

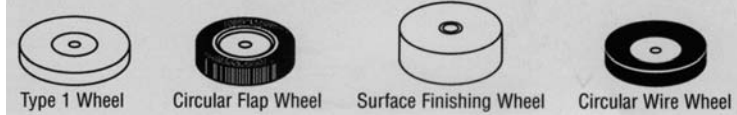

Air Inlet Size: 1/2" NPT
Hose Size: 1/2" (13 mm)
 - Spade Handle available.

Model	Guard Size	Power Output	Air Consumpt.	Length	Max Operating Speed	Safety Lever
51HKS	3"	1.5 hp	35 cfm	18.23"	18,000 rpm	51HKS;18000;301
57HKS	4"	1.5 hp	35 cfm	18.82"	15,000 rpm	57HKS;15000;401

5201HKS



56HKS



Air Inlet Size: 1/2" NPT
Hose Size : 1/2" (13 mm)

Model	Guard Size	Power Output	Air Consumpt.	Length	Max Operating Speed	Throttle Handle Type	
						Safety	Spade
5201H	6"	2 hp	40 cfm	21.53"	8,000 rpm	5201HKS;8000;601	5201HGS;8000;601
56H	6"	3 hp	60 cfm	21.67"	8,000 rpm	56HKS;8000;601	56HGS;8000;601
	8"	3 hp	60 cfm	21.67"	6,000 rpm	56HKS;6000;801	56HGS;6000;801
65H	6"	4 hp	75 cfm	22.32"	8,000 rpm	65HKS;8000;601	65HGS;8000;601
	8"	4 hp	75 cfm	22.32"	6,000 rpm	65HKS;6000;801	65HGS;6000;801

Top Cat manufactures a complete line of quality Horizontal Grinders, from .9 - 4 hp, Extended Lengths, Guards from 3" - 8".

TOP CAT AIR TOOL Supplement

Horizontal Grinders for 3/8"-24 & 5/8"-11 Cone Wheels

Air Inlet Size: 400GH2 3/8" NPT- 51H, 5201H,
56H 65H 1/2" NPT
Hose Size : 1/2" (13 mm)

Spade Handle available for some models.



Model	Spindle Size	Power Output	Air Consumpt.	Length	Max Operating Speed	Safety Lever
400GH2*	5/8"-11	1.2 hp	35 cfm	12.9"	20,000 rpm	400GH2SK;20000
51H*	3/8"-24	1.5 hp	35 cfm	16.83"	18,000 rpm	51HKCW;18000
5201H*	5/8"-11	2 hp	40 cfm	21.53"	12,000 rpm	5201HKCW;12000
56H	5/8"-11	3 hp	45 cfm	21.67"	9,000 rpm	56HKCW;9000
65H	5/8"-11	4 hp	75 cfm	22.32"	8,000 rpm	65HKCW;8000

*Some models available with steel housing.


Horizontal Sanders & Polishers



Model	Collet Size	Rated Speed	Lever	
400HGE36M	1/4"	525 rpm	400HGE36MK;1/4	
Model	Rated Speed	Output Type		
		T5/8-5/8-11 Spindle	S1 - 1 or 5/8" Adaptor	D- Collet
400GH5M	4,000 rpm	400GH5MT5/8	400GH5MS1	400GH5MD;1/4

Air Inlet Size: 3/8" NPT (3/8" BSP available)
Hose Size : 1/2" (13mm)
- 1.2 hp, 35 cfm - Safety Lever available.

Drills - Floor, In-Line & Right Angle

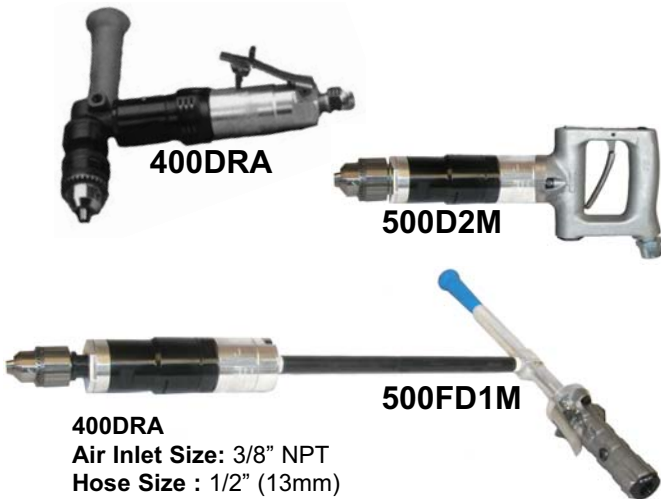

Model	Chuck Size	Maximum Operating Speed	Safety Lever
400DRA (Right Angle)	3/8"	2,000 rpm	400DRA5MK;3/8
	1/2"	440 rpm	400DRA21MK;1/2
500FD1M (Floor)	1/2"	4,000 rpm	500FD1MK;D1/2
	3/4"		500FDMK;D3/4
507FD1M (Floor)	3/4"	1,750 - 3,600 rpm	507D1M;D3/4
Ordering Number			
500D2M (In-Line)	1/2"	1,000 rpm	500D2M;D1/2
	3/4"		500D2M;D3/4

400DRA
Air Inlet Size: 3/8" NPT
Hose Size : 1/2" (13mm)

500 Series
Air Inlet Size: 1/2" NPT
Hose Size : 1/2" (13mm)



Pneutool Parts & Service Co. Ltd
33 Haas Road, Toronto, Ontario M9W 3A1
Tel: 416-748-1200 Toll Free: 1-888-748-1201
Fax: (416)-748-2695
E-mail: sales@pneutool.com